

ReTac®

Textures



ADDS VISUAL INTEREST TO ANY PRINT


ReTac® Textures can add depth and visual appeal to static, flat images with its embossed finish. With ReTac® on the back, eye-catching graphics printed on ReTac® Textures can easily be removed and repositioned multiple times without the worry of adhesive residue being left behind. This phthalate-free film can be easily applied, re-positioned and removed without surface damage or loss of adhesion.

- WOODGRAIN, LINEN, CANVAS AND SAND TEXTURED OPTIONS
- IDEAL FOR INTERIOR PROMOTIONS
- PERFECT FOR APPLICATION IN PUBLIC AREAS THAT REQUIRE COMPLIANCE WITH STRICT FIRE REGULATIONS
- CAN BE REMOVED WITHOUT LEAVING ADHESIVE RESIDUE


Product Code: RTCS, RTCL, RTCC, RTCW

150 White
micron Phthalate-Free
Polymeric
PVC  Matte



 Widths up to 1370mm

 **5** YEARS DURABILITY
INTERIOR AND EXTERIOR
(2 YEAR REMOVABILITY EXTERIOR)

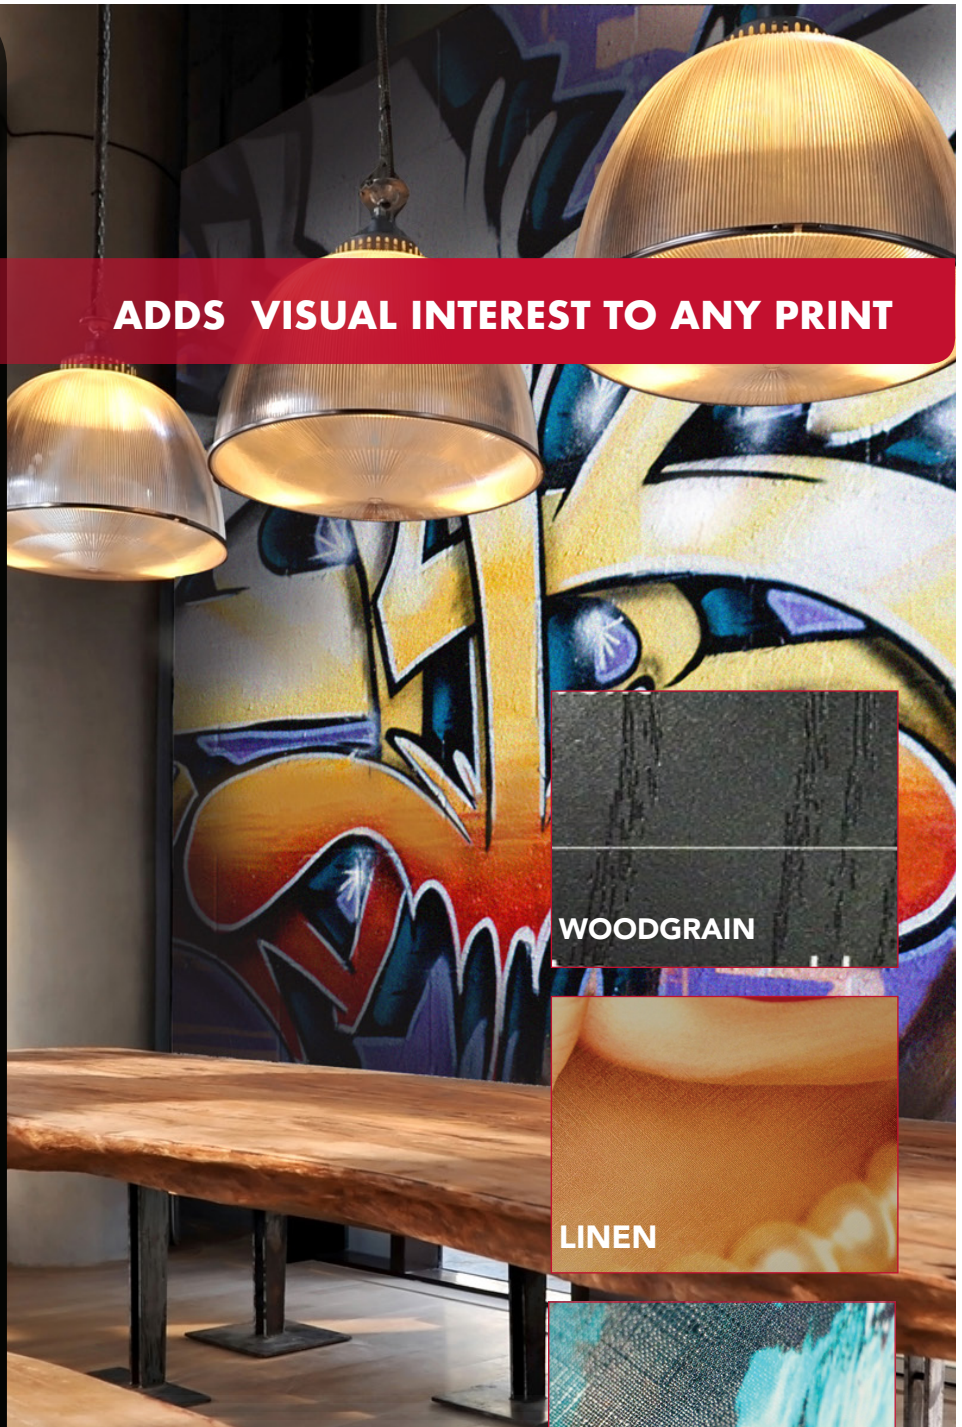

WOODGRAIN

LINEN

CANVAS

SAND

APPLICATIONS

Smooth Flat Surfaces
Point Of Sale Graphics
Interior Décor
Decals & Stickers

DRYTAC®
ADHESIVE SCIENCE

www.drytac.com

ReTac®

Textures

ReTac® Textures is a 150µ (6 mil) printable, matte white phthalate-free polymeric PVC film with ReTac® ultra removable adhesive. It has an embossed texture-like finish that adds depth and visual appeal to static, flat graphics. A subtle texture like sand draws attention to your image or message in a distinct and creative way.

- RETAC® TEXTURES IS A PHTHALATE-FREE FILM.
- IDEAL FOR WALL GRAPHICS, CUSTOM WALL MURALS, INTERIOR DÉCOR, RETAIL DISPLAYS, TRADE SHOW GRAPHICS AND SIGNAGE, AND TEXTURED LABELS.

Please Note: Plasticizer migration from some PVC substrates could cause adhesive residue being left behind upon removal, for more information please contact your local representative.

For more information, performance and warranty guidelines please contact your local Drytac office.

© 2021 Drytac Corporation. E&OE. All other trademarks are the property of their respective owners.

03082021

TECHNICAL SPECIFICATION

PRODUCT STRUCTURE

Film	Embossed Matte White Polymeric PVC
Adhesive	ReTac® ultra removable and re-positionable adhesive technology
Release Liner	143 gsm 2 Side PE Coated, 1 Side Solventless Siliconised Fine Paper

PRODUCT CHARACTERISTICS

Film Thickness	6 mil (150µ) 7 mil (175µ)
Adhesive Layer	1 mil (25µ) (175µ)
Outdoor Durability	5 years; 2 years removability
Fire Ratings	Class C-s1-d0 (EN-13501) Class 1 or A (ASTM E-84) PASS (CAN/ULC-S102)
Slip Ratings (ReTac Textures Sand) <small>*for short-term indoor floor applications only</small>	Moderate Slip Potential (EN 13036-4) Passed (ANSI A137.1/ A326.3) Dry: 58 Wet: 29 (AS HB198:2014 (AS/AZS 4586))
Application Temperature	>41°F (5°C)
Service Temperature Range	-40°F to 120°F (4.4°C to 48.9°C)
Shelf Life	2 years
Storage Conditions	59°F to 72°F (15°C to 22°C); 50 - 55% Relative Humidity

INSTALLATION

RECOMMENDATION

Please see Wall Graphic Installation & Removal Instructions for further details. The surface must be clean and smooth and free of defects before application.

Europe

Filwood Road,
Fishponds,
Bristol, BS16 3RY,
United Kingdom
bristol@drytac.com
Tel: +44 (0) 117 958 6500

Canada

30 Driver Road,
Brampton,
Ontario, L6T 5V2,
Canada
toronto@drytac.com
Tel: +1 800.353.2883

USA

5401-B Eubank Road,
Sandston,
Virginia, 23150,
USA
customerservice@drytac.com
Tel: +1 800.280.6013

DRYTAC®

ADHESIVE SCIENCE

www.drytac.com